
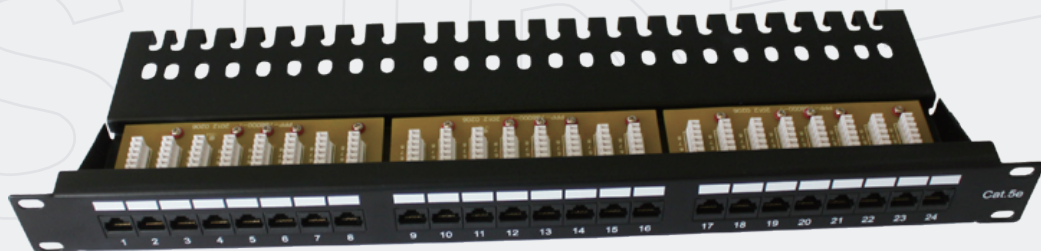


# UTP Cat.5e Patch Panel, 24 Port

SPP-A562L1

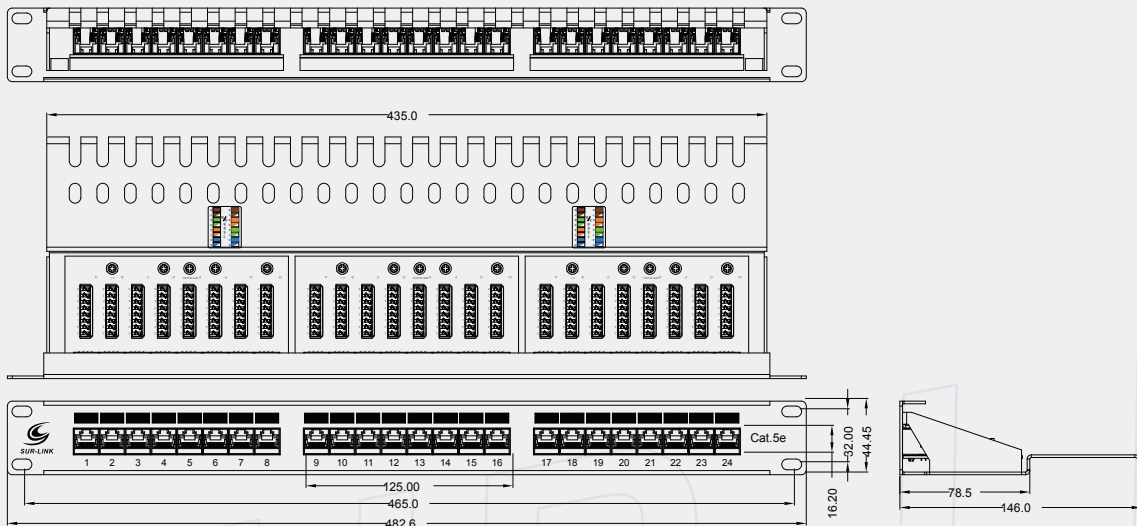

## NOTES:

### ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX
4. INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN
6. C5e PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

### ENVIRONMENTAL:

1. STORAGE : -40° TO +70°
  2. OPERATION : -10° TO +60°
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

### MECHANICAL:

1. HOUSING MATERIAL : PBT+ 30%GF
2. PANEL FRAME : ST-12, POWDER COATING IN BLACK COLOR
3. IDC MATERIAL : PC, TERMINAL: PHOSPHOR BRONZE, TIN PLATING
4. RJ45 JACK LIFE : 750 TIMES MIN
5. IDC LIFE : 200 TIMES MIN
6. WIRE : AWG 22~26
7. TIA Cat5e Perm. Link Test: Worst pair NEXT margin  $\geq$  5.0dB
8. Retentiveness of insertion structure: 50N 60 $\pm$ 5s