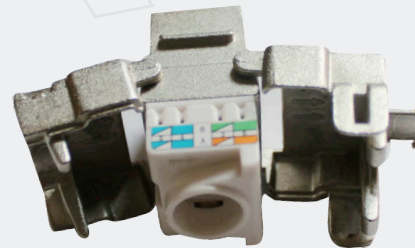

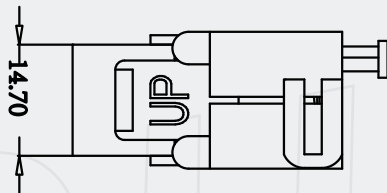

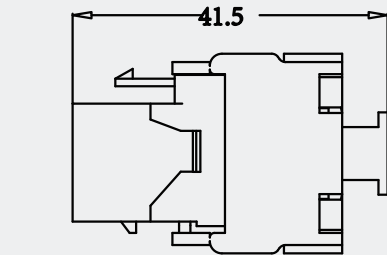


**SKJ-AA61A1**

**NOTES:**
**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX
4. INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz,1MIN
6. C6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

**ENVIRONMENTAL:**

1. STORAGE : -40° TO +70°
  2. OPERATION : -10° TO +60°
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

**MECHANICAL:**

- 1.HOUSING MATERIAL : zinc alloy
- 2.INSERT MATERIAL : FLAME RETARDANT ABS UL94V
- 3.PCB MATERIAL : FR-4 T=1.2mm
- 4.CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN T=0.4mm
- 5.IDC CONTACT MATERIAL : PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
- 6.RJ45 JACK LIFE : 750 TIMES MIN
- 7.IDC LIFE : 200 TIMES MIN
- 8.WIRE : AWG 22~24
- 9.Retentiveness of insertion structure : 50N 60±5s



SUR-LINK®